



Quality and reliability is our tradition

KYORITSU



KYORITSU KEW 6516BT

ATT Anti Trip Technology

LOOP ATT 12/11/2019 16:17

Zs Limit: <2.87

Prot.: MCB B
In: 16A t: 0.4s


0.21 Ω ✓

PFC 1112 A 230.7V

L-N 0.05 Ω 50.0Hz

PSC 4.75kA L-PE L-N

L-PE 3W Pulse ON Limit

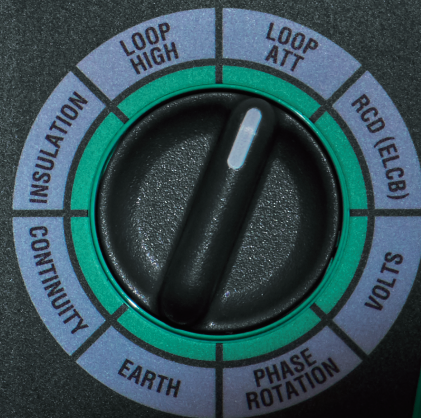

F1 F2 F3 F4 ENTER MEM

DIGITAL MULTI FUNCTION TESTER

HELP (1sec.)


RECALL (1sec.)

Test and Measuring Instruments
Shortform Catalogue **2022-2023**


Japan
QUALITY



INSULATION TESTERS


Analogue Insulation Testers					
Model	3165/3166	3161A	3431	3131A	3132A
Appearance					
Test voltage	1 range	2 ranges	3 ranges	3 ranges	3 ranges
Rated voltage (Max.measurement value)	500V(1000MΩ) (3165) 1000V(2000MΩ) (3166)	15V(20MΩ) 500V(100MΩ)	250V(200MΩ) 500V(200MΩ) 1000V(2000MΩ)	250V(100MΩ) 500V(200MΩ) 1000V(400MΩ)	250V(100MΩ) 500V(200MΩ) 1000V(400MΩ)
Continuity ranges	-	-	-	2/20Ω	3/500Ω
AC Voltage ranges	600V	600V	600V	-	600V
DC Voltage ranges	-	-	600V	-	-
Back light	-	✓	✓	✓	-
Power source	R6/LR6x4	R6/LR6x4	R6/LR6x4	R6/LR6x6	R6/LR6x6
Dimensions (L)x(W)x(D)	90x137x40mm	90x137x40mm	97x156x46mm	167x185x89mm	106x160x72mm
Weight (Approx.)	330g	340g	430g	860g	560g

INSULATION TESTERS

Digital Insulation/Continuity Testers						
Model	3005A/3007A	3021A	3022A	3023A	3551	3552/3552BT*
Appearance						
Test voltage	3 ranges	4 ranges	4 ranges	4 ranges	6 ranges	6 ranges
Rated voltage (Max.measurement value)	250V(2000MΩ) 500V(2000MΩ) 1000V(2000MΩ)	125V(200MΩ) 250V(2000MΩ) 500V(2000MΩ) 1000V(2000MΩ)	50V(200MΩ) 100V(200MΩ) 250V(2000MΩ) 500V(2000MΩ)	100V(200MΩ) 250V(2000MΩ) 500V(2000MΩ) 1000V(2000MΩ)	50V(100MΩ) 100V(200MΩ) 125V(250MΩ) 250V(500MΩ) 500V(2000MΩ) 1000V(4000MΩ)	50V(100MΩ) 100V(200MΩ) 125V(250MΩ) 250V(500MΩ) 500V(20GΩ) 1000V(40GΩ)
Continuity ranges	20/200/2000Ω	40/400Ω	40/400Ω	40/400Ω	40/400/4000Ω	40/400/4000Ω
AC Voltage ranges	600V	20 - 600V	20 - 600V	20 - 600V	2.0 - 600V	2.0 - 600V
DC Voltage ranges	-	-20 - -600V 20 - 600V	-20 - -600V 20 - 600V	-20 - -600V 20 - 600V	-2.0 - -600V 2.0 - 600V	-2.0 - -600V 2.0 - 600V
Back light	✓ (3007A)	✓	✓	✓	✓	✓
Communication interface	-	-	-	-	-	USB,Bluetooth®
Power source	R6/LR6x8	R6/LR6x6	R6/LR6x6	R6/LR6x6	R6/LR6x4	R6/LR6x4
Dimensions (L)x(W)x(D)	167x185x89mm	105x158x70mm	10x158x70mm	105x158x70mm	97x156x46mm	97x156x46mm
Weight (Approx.)	970g (3005A) 990g (3007A)	600g	600g	600g	490g	490g

*Please contact us with inquiries about the purchase of 3552BT.

HIGH VOLTAGE INSULATION TESTERS

Analogue High Voltage Insulation Testers				
Model	3121B	3122B	3123A	3124A
Appearance				
Test voltage	1 range	1 range	2 ranges	Variable
Rated voltage (Max.measurement value)	2500V(100GΩ)	5000V(200GΩ)	5000V(200GΩ) 10000V(400GΩ)	1000V(100MΩ) 1k - 10kV(100GΩ)
Dual resistance scales	✓	✓	✓	✓
Power source	LR14x8	LR14x8	R6/LR6x8	Ni-MH rechargeable battery(1.2V)x8
Dimensions (L)x(W)x(D)	177x226x100mm	177x226x100mm	200x140x80mm	200x140x80mm
Weight (Approx.)	1.6kg	1.7kg	1kg	1.5kg